


Obce chłodzenie silników.

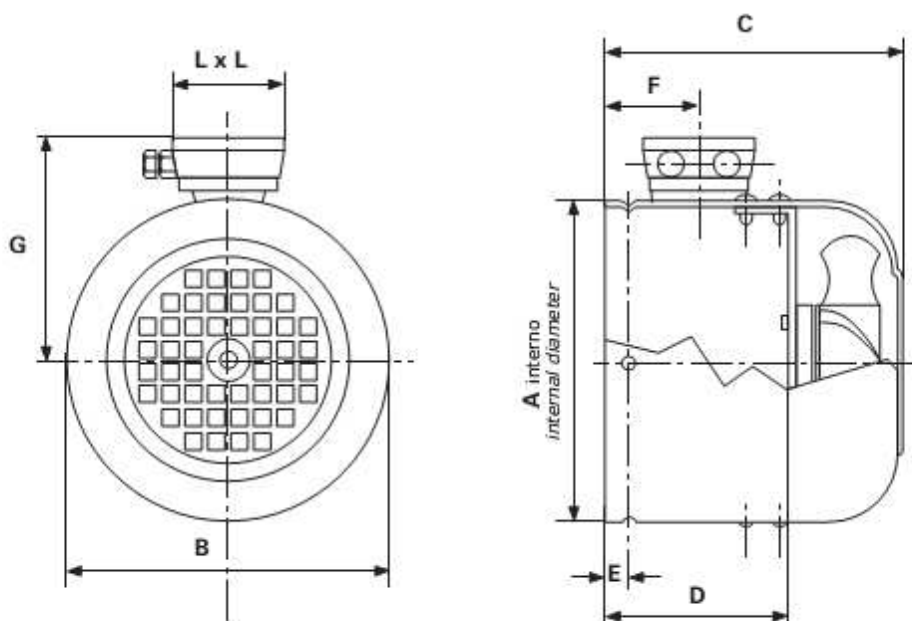

SIZE	VOLTAGE	Hz	NOM. SEPPD 1/MIN	ABSORB. WATT	CURRENT M.A.	AIR FLOW M 3/H
GR63.1F	230	50 / 60	2750	15 / 14	120 / 100	180
GR71.1F	230	50 / 60	2750	15 / 14	120 / 100	180
GR80.1F	230	50 / 60	2750	15 / 14	120 / 100	180
GR90.1F	230	50 / 60	2900	42 / 36	190 / 180	340
GR100.1F	230	50 / 60	2900	42 / 36	190 / 180	340
GR112.1F	230	50 / 60	2900	42 / 36	190 / 180	340
GR132.1F	230	50 / 60	2900	42 / 36	190 / 180	340

SIZE	COD. IP55	A	B	C	D	E	F	G	L x L
GR63.1F	AS063230	121	123	102	58	6	50	104	75
GR71.1F	AS071230	136	138	120	70	6	50	111	75
GR80.1F	AS080230	153	155	130	80	6	55	125	100
GR90.1F	AS090230	172	176	145	75	6	60	135	100
GR100.1F	AS100230	195	197	158	85	8	60	150	100
GR112.1F	AS112230	218	220	160	100	10	60	160	100
GR132.1F	AS132230	255	257	180	120	8	65	175	100

Dostępne są także obce chłodzenia z zasilaniem 3-fazowym (400V), oznaczenie 3F.